
BRIGHTWELL

MULTIPLEX 1 LAUNDRY DOSING SYSTEM INDUSTRIAL PRODUCT DATASHEET



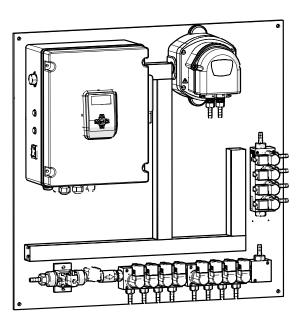

Description

The Multiplex 1 unit is designed to cater to a smaller range of laundry sizes, serving establishments with up to 5 washing machines. With safety as a top priority, the Multiplex dosing system incorporates several key features to ensure peace of mind for operators. From rigorous leak and water testing protocols to comprehensive chemical compatibility checks, Multiplex guarantees a secure dosing routine. Its innovative design also includes continuous channel cleaning with water, effectively minimising maintenance requirements and ensuring uninterrupted operation. The unit's compact build and efficient performance make it an excellent choice for smaller laundromats or facilities seeking reliable and low-maintenance solutions.

Technical Specifications

		Value
UNIT	Maximum of products	8
	Maximum number of washing machines	5
INTERACTION	Functions	Configure
		Real-Time View
		Reports
		Password Management
	Interface	Webserver (Local)
		Web Portal
		Basic screen for washer status and alerts
ELECTRICAL PARAMETERS	Voltage / Frequency	110-240 VAC / 50-60Hz
	Power	108W

Technical Specifications

		Value
	Pressure in dynamic range	1.5 bar (min) - 3 bar (max)
		Regulator recommended
	Flow rate range	min 2/l per min - max 10/l per min
WATER	Inlet connection	Barb 10mm
	Maximum temperature	< 30 ° C
	Recommended hardness	< 8°dH
	Booster tank	Not included. Supplied on request.
		Recommended.
	Water Pressure Regulator	Included
PANELS	Material	PVC
	Number	1 pump per channel. Main channel: electric diaphragm
	Flow rate (with water)	1.5 litres/minute
PUMPS	Body	PVDF
	Membranes	PTFE
	Non return valves	PVDF/FFKM
• • • • • • • • • • • • • • • • • • • •	Voltage	24VDC
PRODUCT/WATER	Body	PP
VALVES	Closure piston	PTFE
	O-rings	FFKM
	Standard measuring principle	Water only flow sensor
		Paddle Sensor (Not included, recommended)
	Signal	9 - 24 VDC PNP
FLOW SENSOR	Body	PVC/PA PP
	Closure piston	PTFE (Paddle wheel only)
		NBR
	O-rings	FFKM
	Distribution	Integrated distributor
	Outlet barb diameter	10 mm
DOSING	Outlet barb material	PVDF
	Built-in tubes	EVA tube 10x16 mm
	Recommended pipes for installation	Braided (UK & US) PVC 10x16
CALIBRATION	Mode	Via distributor
	Measuring cup type	Not included * recommend
FORMULAS	Number	200
	Dose units	g/kg
		fl.oz/cw
	Maximum number of doses per phase	6


T +44 (0) 1273 513566 E sales@brightwell.co.uk W brightwell.co.uk

Unit 1, Rich Industrial Estate, Avis Way, Newhaven, East Sussex, BN9 0DU, UK

All information in this data sheet is correct at the time of printing and is subject to change without notice.

		Value
STATISTICS	Data	Cloud synchronisation
		On board storage
	Information	Production in load and cycles
		Consumption and product cost
		OEE
		Alarms
REMOTE ACCESS	Availability	Data always available on the web portal and
		the possibility to make changes at any time,
		with instant synchronisation
	Router *Internet access	Not included in the equipment

Diagram

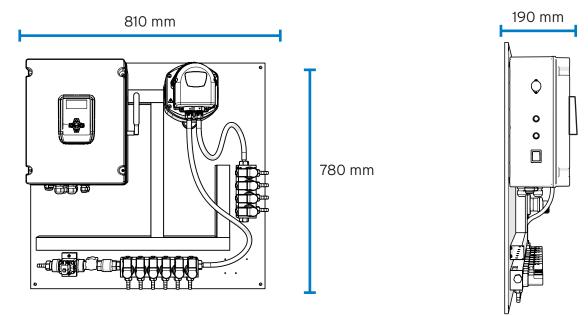

Dimensions


Width	810 mm
Height	780 mm
Depth	190 mm

Weight

Unit

18.60kg

T +44 (0) 1273 513566 E sales@brightwell.co.uk W brightwell.co.uk Unit 1, Rich Industrial Estate, Avis Way, Newhaven, East Sussex, BN9 ODU, UK All information in this data sheet is correct at the time of printing and is subject to change without notice.

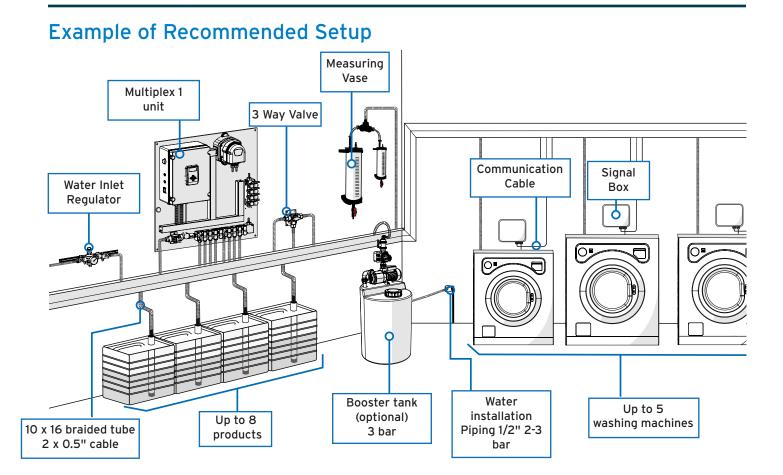

T +44 (0) 1273 513566 E sales@brightwell.co.uk W brightwell.co.uk Unit 1, Rich Industrial Estate, Avis Way, Newhaven, East Sussex, BN9 ODU, UK All information in this data sheet is correct at the time of printing and is subject to change without notice.